

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
28 July 2005 (28.07.2005)

PCT

(10) International Publication Number  
**WO 2005/068945 A1**

(51) International Patent Classification<sup>7</sup>: **G01F 11/20**,  
B01F 13/10

(74) Agent: **GARAVELLI, Paolo**; A.Bre.Mar. S.r.l., Via Servais 27, I-10146 Torino (IT).

(21) International Application Number:  
PCT/IT2004/000578

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 22 October 2004 (22.10.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
TO2004A000012 13 January 2004 (13.01.2004) IT

(71) Applicant (*for all designated States except US*):  
**NORDIMPIANTI TECHNOLOGIES S.R.L.** [IT/IT];  
Viale Industria 11, I-12051 Alba (IT).


(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **SACCHET, Alessandro** [IT/IT]; c/o Nordimpianti Technologies, S.R.L., I-12051 Alba (IT).

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,

[Continued on next page]

(54) Title: DYE METER

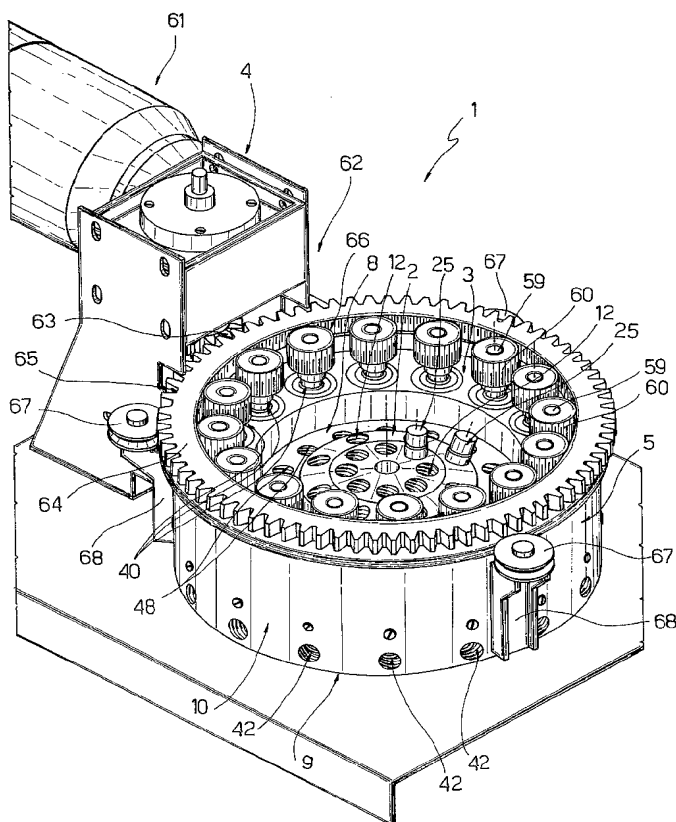

(57) Abstract: A dye meter (1) is disclosed that is equipped with an assembly (2) for dispensing a plurality of components for making dyeing compositions, a pumping assembly (3) for supplying the dispensing assembly (2), and circuit means (21, 23) for a fluidic connection between the dispensing assembly (2) and the pumping assembly (3); the dispensing assembly (2) comprises a support body (5) defining a plurality of nozzles (7) for delivering respective components; the pumping assembly (3) comprises a plurality of pumps (40) housed into respective seats (41) obtained in the support body in such a way that the circuit means are defined by holes obtained in the support body itself.

WO 2005/068945 A1



SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,  
GW, ML, MR, NE, SN, TD, TG).

**Declaration under Rule 4.17:**

— *of inventorship (Rule 4.17(iv)) for US only*

**Published:**

— *with international search report*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*